


PVC Cable Trunking



- **Function:** Cabling
- **Material:** PVC
- **Configuration:** Rigid
- **Width:** Max: 200mm Min: 10mm
- **Height:** Max: 100mm Min: 9mm
- **Feature:** High Performance, Light in weight, Weather proof

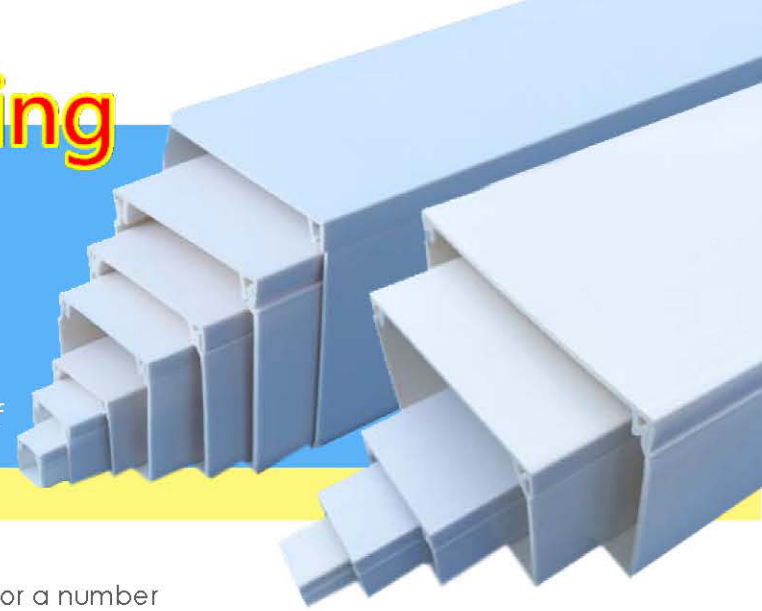

Shingfong's PVC trunking range is the perfect solution for a number of cable management project installations, including domestic and commercial installs. Adhesive foam tape backing is available for absorbing unwanted and uneven surfaces. It's supplied in more than 200 different size and thickness. They are available with a range of accessories and fittings. Using this trunking, in addition, it is advisable to use screw and wall plugs attachment for certain applications.

Product Description

Material	High impact resistant PVC compound, giving a durable yet versatile finish.
Work Temperature	Can be operated between a temperature range of -40° C to 65° C.
Structure	Made up of duct bottom and lid.
Available Color	* White or grey colors for a perfect integration in any environment; * Customized color is available;
Size	Comes in 44 sizes, from min. 10x10mm to max. 200x100mm;
Application	The lid can be snapped into place with ease, making the product ideal for "moves, adds and changes".
Usage	PVC trunking allows for both power and data cables to be installed within commercial and domestic buildings, making it the ideal product for new builds and refurbishments.
Feature	<ul style="list-style-type: none">• Good insulation, able to resist 25KV voltage, assuring a safe system;• Solid design, especially for anti-dust and mouse;• Combustion-proof, damp-proof, alkali-resistant, aging-resistant;• Easy installation, light weight, easy to cut, transport, bent and handle;• Easy to connect by solvent cement & threading joining without leakage.





15x10mm

18x9mm

25x16mm

40x25mm

50x25mm



60x40mm

80x50mm

100x40mm

100x50mm

200x100mm

PVC Square Trunking



10x10mm

12x12mm

16x16mm

20x20mm

25x25mm



40x40mm

50x50mm

60x60mm

75x75mm

100x100mm

Characteristic of PVC Trunking

Various Sizes

Available in more than 200 different size and thickness

Adhesive backing available

Available with an adhesive backing, making it quick and easy to install

Snap on lids

Easy to snap on and snap off, making cables easy to install



Parameter

Unit: mm

W x H	Thickness (mm)	PCS /PKG	W x H	Thickness (mm)	PCS /PKG
10x10	0.55/ 0.65	50	50x40	1.3	10
12x12	0.6	50	50x50	1.10/ 1.25/ 1.5	8
15x10	0.58/ 0.7/ 0.8/ 1.0	30	59x22	1.3/ 1.0	10
16x16	0.58/ 0.7/ 0.8/1.0	30	60x22	1.2/ 1.0/ 0.85	10
18x9	0.7/ 0.58	30	60x40	1.7/ 1.5/ 1.4/ 1.2	6
20x10z	0.8	25	60x60	1.2/ 1.6	6
20x10	0.95/ 0.85/ 0.80/ 0.75/ 0.65	25	75x50	2.0/ 1.7/ 1.4/ 1.25/ 1.1	4
20x20	0.8/ 0.9/ 1.0/ 1.2/ 1.4	30	75x75	1.3/ 1.6/ 1.8	2
24x14	0.9/ 0.8/ 0.7/ 0.65/ 0.6/ 0.55	25	80x40	1.2/ 1.5	4
25x16z	1.0	25	80x50	1.2/ 1.6/ 1.8	4
25x16	1.2/ 1.1/ 1.0/ 0.85/ 0.75/ 0.65/ 0.6	20	80x60	1.4	4
25x25	0.75/ 0.85/ 1.0/ 1.25	25	100x27	1.2/ 1.4	5
30x13	0.8/ 0.7/ 0.6	20	100x40	1.3/ 1.5/ 1.7	4
30x15	0.85/ 0.65	20	100x50	1.3/ 1.75	4
33x33	1.0	16	100x60	1.4/ 1.8/ 2.0	2
36x16	1.3/ 1.0/ 0.8/ 0.65	15	100x75	1.5/ 1.8	2
38x18	1.1/ 0.9/ 0.75	15	100x100	1.5/ 1.8/ 1.9	2
39x19	1.0/ 0.9/ 0.8/ 0.7	15	120x60	2.00	2
40x16	1.25/ 1.0/ 0.85/0.7	15	120x80	2.30	2
40x25	1.5/ 1.4/ 1.3/ 1.2/ 1.0/ 0.9/ 0.8/ 0.7	12	150x50	2.30	2
40x40	0.85/ 1.0/ 1.3	9	150x100	2.40	2
50x25	1.2/ 1.0/ 0.75	10	200x100	2.30	1

Remarks: We could adjust the thickness according to client's request.



With fiber rope



With Packing Belt



take out the cover
put into the body



smaller trunking
insert into bigger one

PVC Arc Floor Trunking

- Standard Length: 2000mm
- Standard Color: Grey
- Provide great cable protection
- Shock resistant and self-extinguishing thermoplastic
- Lead-free material



Shingfong PVC Arc Floor Trunking backed with high quality double sided tape, used for permanent fixture floor wiring to facilitate trolley pass and to avoid tripping, especially in public places, like shopping malls, hospitals, and stations. The bottom of duct can be stuck with double-coated tape then fasten on the floor easily.

Product Description

Material	PVC.
Work Temperature	Can be operated between a temperature range of -40° C to 65° C.
Structure	Made up of duct bottom and lid.
Available Color	* Regular color: White, Grey; * Customized color is available;
Size	Comes in 5 sizes, from min. 25x8mm to max. 100x30mm;
Feature	<ul style="list-style-type: none">• Good insulation, able to resist 25KV voltage, assuring a safe system;• Solid design, especially for anti-dust and mouse;• Combustion-proof, damp-proof, alkali-resistant, aging-resistant;• Easy installation, light weight, easy to cut, transport, bent and handle;• Easy to connect by solvent cement & threading joining without leakage.



PVC Arc Floor Trunking



25x8mm

35x10mm

50x15mm

70x20mm

100x30mm

PVC Arc Compartment Trunking



50x15mm

70x20mm

100x30mm

PARAMETER


Unit: mm

PVC Arc Floor Trunking


Size(mm)	Thickness(mm)	PCS/PKG
25x8	1.25	30
35x10	1.4	30
50x15	1.8	20
70x20	2.1	10
100x30	2.3	5

PVC Arc Compartment Trunking

Size(mm)	Thickness(mm)	PCS/PKG
50x15	1.5	30
70x20	1.7	30
100x30	2.0	20



Foam Seal Double-Sided Adhesive Tape

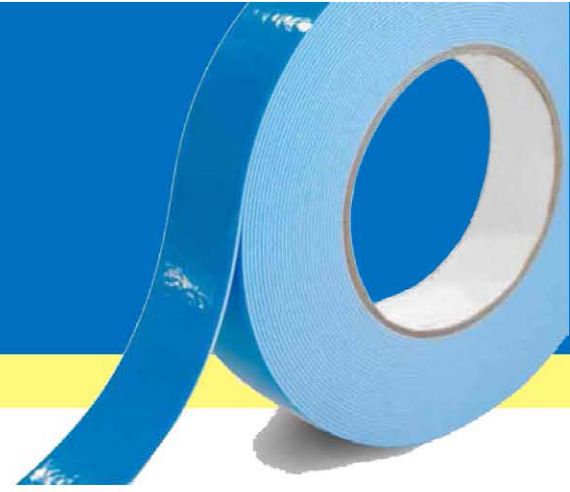

Automatic sticking equipment

Feature

- 1) Double sided adhesive
- 2) Strong stickiness
- 3) Special glue used for wiring duct
- 4) It's designed with strong adhesive to keep the sealant in place.
- 5) It prevents stretching during installation and permits fast application

Parameter

	Cover layer	Tape
Material	PET Release Tape / PE Film	PE Foam Tape
Available Color	White / Red / Blue / Yellow / Dark Green	White / Black

* Customized color is available; more MOQ is required for special color.

* Regular width of adhesive tape is: min. 7mm to max. 85mm.

* Customized width could be made;

